


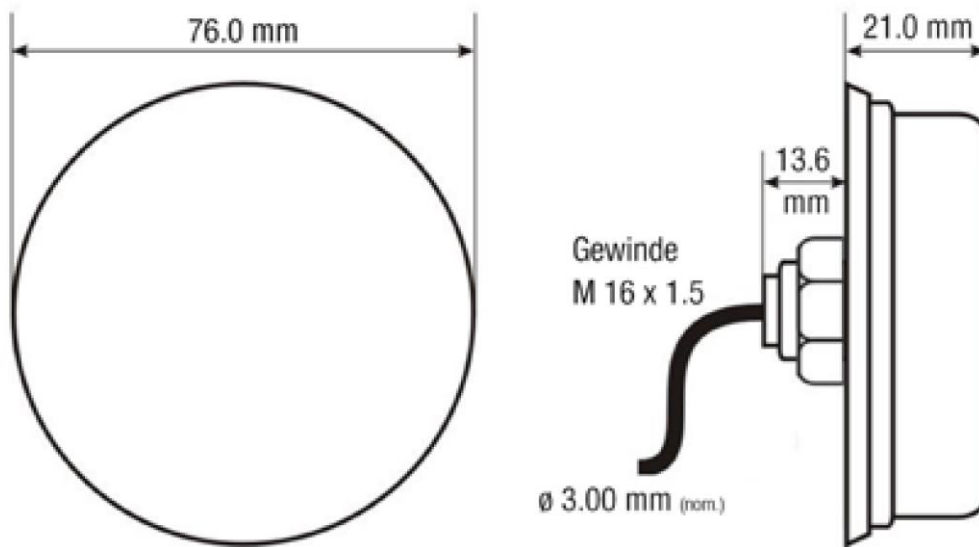
GS-ANT-WL-2453R- SMA



Technical Data			
2.4 GHz / 5.3 GHz			
Roof mount			
WiFi	Frequency Range	2400 – 2480 MHz (802.11 b/g/n)	5150 – 5850 MHz (802.11 a/h/j/n/ac)
	VSWR*	< 2.0 typ.	
	Peak gain*	2400 MHz +3 dBi typ.	5300 MHz +1 dBi typ.
	Power Max.	10 W	
* Measured with 0.6m cable on 300x300mm ground plane			
Mechanical Data			
	Dimensions (ØxH)	ca. 76 mm x 21 mm	
	Cable	2m Super LowLoss	
	Connector	WiFi: SMA (m)	
	Temperature range	-40°C to +85°C (operating temperature)	
	Water resistant	IP69K	
	RoHS, REACH compliant		


GS-ANT-WL-2453R- SMA

Drawing:



Radiation diagrams:

2.4 GHz

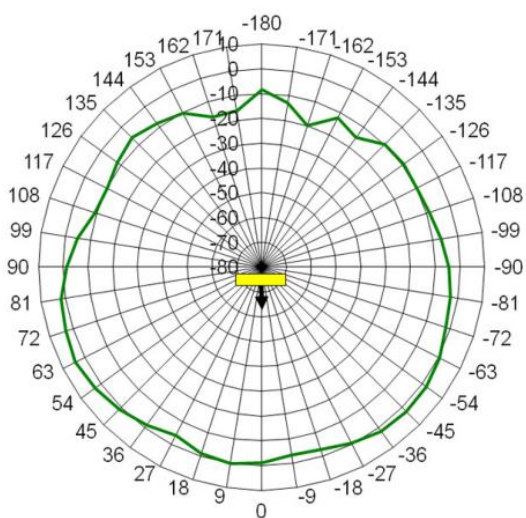

5.3 GHz

