

GS-ANT-86-100



Technical Data		
4G LTE-Antenna, SMA (m), with flexible joint		
LTE	Frequency Range	698 - 960 MHz 1710 - 2700 MHz
	VSWR*	1 : 3.0
	Gain	2.0 dBi
	Power Max.	20 W
	Impedance	50 Ω
	Polarization	Vertical
	Radiation	Omnidirectional
Mechanical Data		
	Dimensions (\varnothing xH)	ca. 10 mm x 95 mm
	Connector	SMA (m) rotatable (up to 90°)
	RoHS compliant	

GS-ANT-86-100

Drawing:

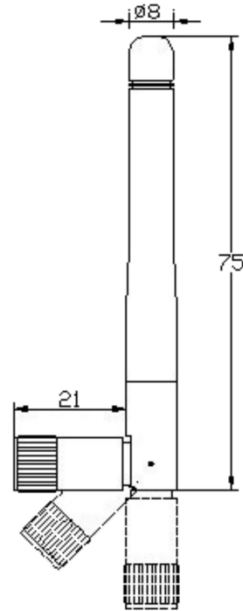


Diagram:

